


Air Bags

1.5 - 70 Ton Airbag Specifications & Accessories


202 Dual Controller

291 Single Controller

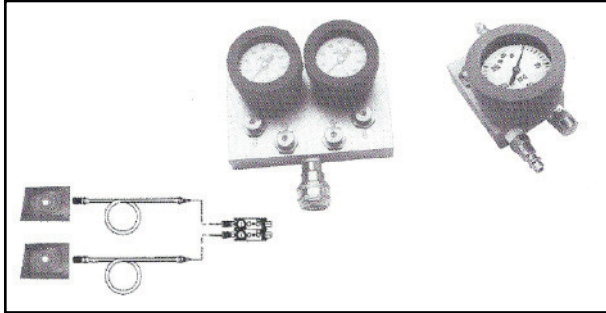


Specifications									
Max Lifting Cap. (Tons)	Lifting Ht. (in)	Model (Steel)	Model (Kevlar)	Max Working Pressure (p.s.i.)	Dimensions				
					Length (in)	Width (in)	Collapsed Ht. (in)	Weight (Steel)	Weight (Kevlar)
1.5	2.0	-	101k	120	6	6	.75	N/A	2
3.3	3.0	-	103k	120	12	6	.75	N/A	3
6	4.5	106s	106k	120	10	10	1	6	4
13	7.5	113s	113k	120	15	15	1	15	11
22	9.5	122s	122k	120	20	20	1	28	22
32	12	132s	132k	120	21	25	1	35	28
50	15	150s	150k	120	29	29	1	63	45
70	18	170s	170k	120	34	34	1	81	60

Green shading reflects rental inventory.



All lifting capacities mentioned in the charts are measured at the maximum effective lifting area (A). As the jack is inflated (B), this effective area decreases (C) due to the rounded shape of the jack. Lifting capacity also decreases (see performance chart).



Stack up two jacks together to increase effective lifting height.

