
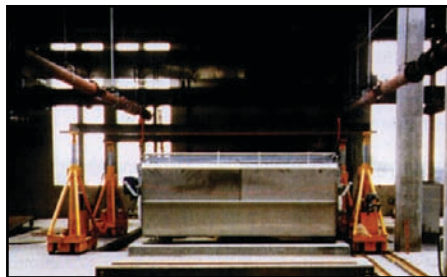
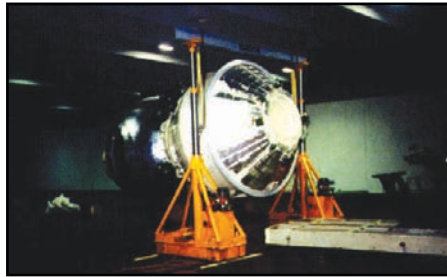


Mini Jacks

20 - 40 Ton Point Lift System Specifications

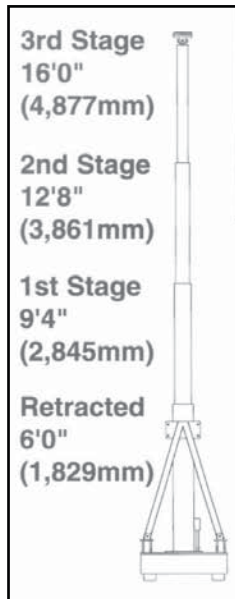

| Model 2020SC, 20 Ton 2 Point Lift System Specifications | | | | | | | | | |
|---|-----------------|-------------|-------------|-------------|-------------|-------------|-------------|------------|-----------|
| Pressure (Bar) | 1,800 PSI (124) | 1,600 (110) | 1,400 (97) | 1,200 (83) | 1,000 (69) | 800 (55) | 600 (41) | 400 (28) | 200 (14) |
| 16'0" (4,877 mm) 3rd Stage | 20 Ton (18) | 19 Ton (17) | 16 Ton (14) | 14 Ton (12) | 11 Ton (9) | 9 Ton (8) | 7 Ton (6) | 4 Ton (3) | 2 Ton (1) |
| 12'8" (3,861 mm) 2nd Stage | — | — | — | 20 Ton (18) | 18 Ton (16) | 14 Ton (12) | 11 Ton (9) | 7 Ton (6) | 3 Ton (2) |
| 9'4" (2,845 mm) 1st Stage | — | — | — | — | — | 20 Ton (18) | 16 Ton (14) | 10 Ton (9) | 5 Ton (4) |

Green shading reflects rental inventory.

| Model 4040SC, 40 Ton 4 Point Lift System Specifications | | | | | | | | | |
|---|-----------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|------------|
| Pressure (Bar) | 1,800 PSI (124) | 1,600 (110) | 1,400 (97) | 1,200 (83) | 1,000 (69) | 800 (55) | 600 (41) | 400 (28) | 200 (14) |
| 16'0" (4,877 mm) 3rd Stage | 40 Ton (36) | 36 Ton (34) | 33 Ton (29) | 28 Ton (25) | 23 Ton (20) | 19 Ton (17) | 14 Ton (12) | 9 Ton (8) | 4 Ton (3) |
| 12'8" (3,861 mm) 2nd Stage | — | — | — | 40 Ton (36) | 37 Ton (33) | 29 Ton (26) | 22 Ton (19) | 14 Ton (12) | 7 Ton (6) |
| 9'4" (2,845 mm) 1st Stage | — | — | — | — | — | 40 Ton (36) | 32 Ton (29) | 21 Ton (19) | 10 Ton (9) |

Green shading reflects rental inventory.



Mini Jacks

20 Ton 2 Point Lift System Specifications

MiniJack™ Specifications

Standard Equipment:

Lifting Units (Each): Maximum Extended Height: 16' (4,877 mm). Retracted Height: 6' (1,829 mm). 10 (9) ton capacity. Light weight platform with cylinder support struts. Steel wheels with anti-friction bearings. Self-contained integral hydraulic system with preparation for the addition of a remote control system, required to operate the lifting units. Header plate on lift cylinder for attaching lift beam. Maneuvering dolly to ease placement of each pair of lifting units. Standard paint color is Lift Systems' yellow.

*A.S.W.: 1,800 lbs. (817kg)

Integral Hydraulic Power System: 14 gal. (53L) reservoir. Necessary filters. Gear pump at 1 g.p.m. (3.8 l.p.m.). Standard power is electric 115 volt (15.2 full load amps), domestic 1.5 HP (1.11kw) @ 60Hz power and international 1 HP (0.74kw) @ 50Hz.




Optional Equipment:

Hydraulic Power Drive: High traction rubber drive wheels with hydraulic motor drive. Attaches to end of lift unit for smooth continues travel.

*A.S.W. per pair: 120 lbs. (54kg)

Lifting Links (Each): 10 (9) ton capacity. One link per lifting unit. Consult factory for custom links to suit customer needs and applications.

*A.S.W.: 38 lbs. (17.24kg)

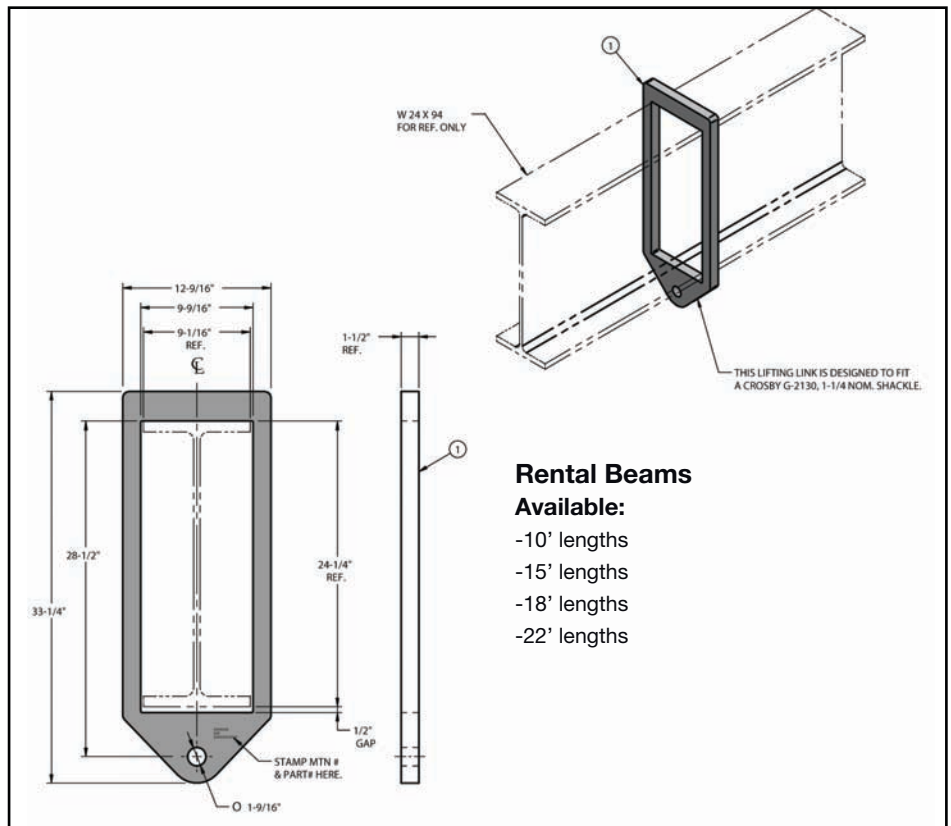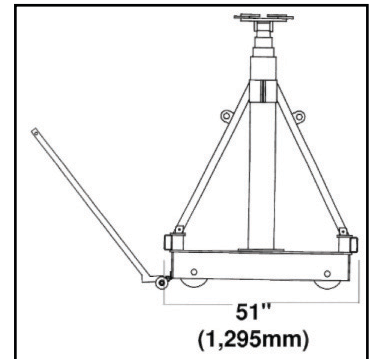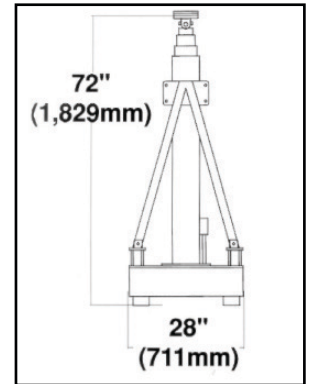

Rental Beams

Available:

- 10' lengths
- 15' lengths
- 18' lengths
- 22' lengths

