
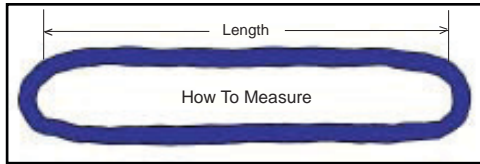


Polyester Roundslings

Tuflex Endless Roundslings

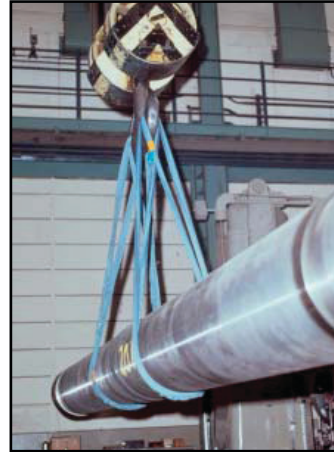

Specifications										
Code	Color	Rated Capacity (lbs)			Minimum Length (ft)	Approximate Measurements				
		Vertical	Choker	Basket		Weight (lbs / ft)	Body Dia. Relaxed (in)	Width at Load (in)	Minimum Hardware Dia* (in)	
EN30	Purple	2,600	2,100	5,200	1 1/2	.2	5/8	1 1/8	1/2	
EN60	Green	5,300	4,200	10,600	1 1/2	.3	7/8	1 1/2	5/8	
EN90	Yellow	8,400	6,700	16,800	3	.5	1 1/8	1 7/8	3/4	
EN120	Tan	10,600	8,500	21,200	3	.6	1 1/8	2 1/8	7/8	
EN150	Red	13,200	10,600	26,400	3	.8	1 3/8	2 1/4	1	
EN180	White	16,800	13,400	33,600	3	.9	1 3/8	2 1/2	1 1/8	
EN240	Blue	21,200	17,000	42,400	3	1.3	1 3/4	3	1 1/4	
EN360	Grey	31,000	24,800	62,000	3	1.7	2 1/4	3 3/4	1 1/2	
EN600	Brown	53,000	42,400	106,000	8	2.8	2 3/4	4 5/8	1 7/8	
EN800	Olive	66,000	52,800	132,000	8	3.4	3 1/8	5 1/4	2 1/8	
EN1000	Black	90,000	72,000	180,000	8	4.3	3 5/8	6	2 1/2	

Green shading reflects rental inventory.


Do not exceed rated capacities. Sling capacity decreases as the angle from horizontal decreases. Slings should not be used at angles of less than 30°.

Sales@lgh-usa.com | Rigging



Polyester Roundslings

Braided Tuflex Roundslings - 6 Part

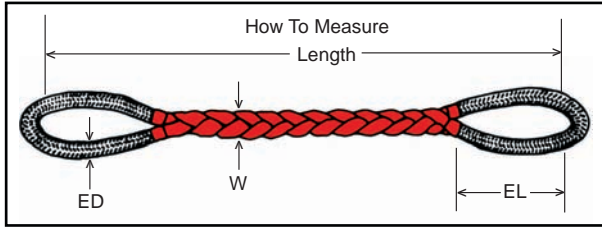

6 Part Flat Braid (B6E) Specifications												
Model	Color	Rated Capacity (lbs)			Minimum Length (ft)	Approximate Measurements						
		Vertical	Choker	Basket		Weight (lbs / ft)	Standard Eye Length (EL) (in)	Width at Load (W) (in)	Thickness at Load (in)	Eye Dia. (ED) (in)	Minimum Hardware Dia* (in)	
B6E30	Purple	6,700	5,300	13,400	4 1/2	.8	15	3 1/4	3/4	1 3/4	5/8	
B6E60	Green	13,500	10,800	27,000	5	1.2	15	3 3/4	1 1/8	2	1	
B6E90	Yellow	21,400	17,100	42,800	5 1/2	1.6	15	4 1/4	1 1/4	2	1 1/4	
B6E120	Tan	27,000	21,600	54,000	5 1/2	2.0	15	4 1/2	1 5/16	2 1/4	1 3/8	
B6E150	Red	33,600	26,800	67,200	6 1/2	2.7	20	5 1/4	1 3/4	2 1/2	1 1/2	
B6E180	White	42,800	34,200	85,600	7	3.2	20	5 1/2	2	2 3/4	1 3/4	
B6E240	Blue	54,000	43,200	108,000	9	4.4	20	6 5/8	2 1/4	3 1/2	1 3/4	
B6E360	Grey	79,000	63,200	158,000	9 1/2	6.5	30	8 1/4	2 1/2	4 1/4	2 1/2	
B6E600	Brown	135,100	108,000	270,200	10 1/2	9.7	30	11	2 3/4	5	3	
B6E800	Olive	168,300	134,600	336,600	13	12.0	30	12	4	5 1/4	3 1/2	
B6E1000	Black	229,500	183,600	459,000	14 1/2	15.6	31	13 1/2	4 1/2	5 3/4	4	

* This is the smallest recommended connection hardware diameter to be used for a vertical hitch.
Green shading reflects rental inventory.



!
Do not exceed rated capacities. Sling capacity decreases as the angle from horizontal decreases. Slings should not be used at angles of less than 30°.



Polyester Roundslings

Braided Tuflex Roundslings - 8 Part



Always use Wear Pads to protect synthetic slings from being cut by load edges.



Do not exceed rated capacities. Sling capacity decreases as the angle from horizontal decreases. Slings should not be used at angles of less than 30°.

8 Part Round Braid (B8E) Specifications

Model	Color	Rated Capacity (lbs)			Minimum Length (ft)	Approximate Measurements					
		Vertical	Choker	Basket		Weight (lbs / ft)	Standard Eye Length (EL) (in)	Width at Load (W) (in)	Thickness at Load (in)	Eye Dia. (ED) (in)	Minimum Hardware Dia* (in)
B8E30	Purple	8,800	7,100	17,600	4 1/2	1.1	15	3 1/2	1	1 3/4	3/4
B8E60	Green	18,000	14,400	36,000	5	1.5	15	4	1 3/8	2	1 1/8
B8E90	Yellow	28,500	22,800	57,000	5 1/2	2.2	15	4 3/4	1 5/8	2 1/2	1 1/2
B8E120	Tan	36,000	28,800	72,000	5 1/2	2.6	15	5	1 3/4	2 1/2	1 1/2
B8E150	Red	44,900	35,900	89,800	6 1/2	3.6	20	6	2 1/8	2 3/4	1 3/4
B8E180	White	57,100	45,600	114,200	7	4.1	20	6 1/4	2 1/2	3 1/4	2
B8E240	Blue	72,000	57,600	144,000	9	5.6	20	7 1/2	2 3/4	3 3/4	2
B8E360	Grey	105,400	84,300	210,800	9 1/2	8.3	30	9 1/2	3 1/4	4 1/2	2 1/2
B8E600	Brown	180,200	144,100	360,400	10 1/2	12.0	30	13	3 3/4	5 1/2	3 1/2
B8E800	Olive	224,400	179,500	448,800	13	16.0	30	13 1/2	4 1/2	6	4
B8E1000	Black	306,000	244,000	612,000	14 1/2	20.0	31	15 3/4	5 1/4	6 1/2	4 3/4

Green shading reflects rental inventory.




Sales@lgh-usa.com | Rigging



Polyester Roundslings

KeyFlex Round Sling



KeyFlex Capacities and Measurements								
Model	Rated Capacity (lbs)			Minimum Length (ft)	Approximate Measurements			
	Vertical 	Choker 	Basket 		Weight (lbs / ft)	Body Dia. Relaxed (in)	Width at Load (W) (in)	Minimum Hardware Dia* (in)
KEN10K	10,000	8,000	20,000	3	.3	1	1 3/4	7/8
KEN15K	15,000	12,000	30,000	3	.5	1 1/8	2	1
KEN20K	20,000	16,000	40,000	3	.6	1 1/4	2 1/4	1 1/4
KEN25K	25,000	20,000	50,000	3	.7	1 1/4	2 1/2	1 3/8
KEN30K	30,000	24,000	60,000	8	.8	1 3/8	2 3/4	1 1/2
KEN40K	40,000	32,000	80,000	8	1.0	1 3/4	3	1 1/2
KEN50K	50,000	40,000	100,000	10	1.2	1 7/8	3 1/2	1 3/4
KEN60K	60,000	48,000	120,000	10	1.5	2	3 3/4	2
KEN70K	70,000	56,000	140,000	10	1.7	2 1/8	4	2 1/2
KEN80K	80,000	64,000	160,000	10	1.8	2 1/4	4 1/2	2 1/2
KEN90K	90,000	72,000	180,000	10	2.1	2 1/2	4 3/4	2 1/2
KEN100K	100,000	80,000	200,000	10	2.6	2 3/4	5	2 1/2
KEN125K	125,000	100,000	250,000	10	3.0	3	5 1/4	3
KEN150K	150,000	120,000	300,000	10	3.5	3 1/4	5 1/2	3 1/2
KEN175K	175,000	140,000	350,000	10	4.0	3 1/2	6	3 1/2
KEN200K	200,000	160,000	400,000	10	4.5	3 3/4	6 1/4	3 1/2

Green shading reflects rental inventory.

