LIFTING GEAR HIRE CORPORATION

PHONE: 800-878-7305 | FAX:708-430-3536 | www.lgh-usa.com

Hydraulic Cylinders
15 - 25 Ton Spring Return

Key Points:
- Green shaded columns deonte rental invetory.

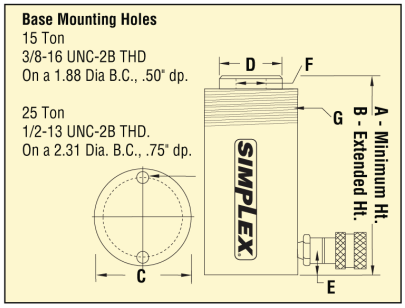

Specifications

Model Number	Cap. (tons)	Stroke (in)	A Min. Ht. (in)	B Ext. Ht. (in)	Ram Bore Dia. (in)	Effect Area (sq in)	Pres. @ Cap. (psi)	Oil Cap. Req'd (cu in)	C Body O.D. (in)	D Piston O.D. (in)	E Base to Port C/L (in)	F		G		Weight (lbs)	Sugstd. Hand Pump
												Piston I.D. Thrds. (in)	Piston Thrd. Depth (in)	Collar Thrds. (in)	Collar Thrd. Lgth. (in)		
R152	15	2	5 7/8	7 7/8	2	3.14	9,554	6.3	2 3/4	1 5/8	3/4	1 x 8	1	2 3/4 x 16	1 3/16	8.3	P42
R154		4	7 7/8	11 7/8				12.6								10.8	
R156		6	10 11/16	16 11/16				19.0			1					14.5	
R1510		10	14 11/16	24 11/16				31.4								19.5	P140
R1514		14	18 11/16	32 11/16				44.0								24.5	
R251	25	1	5 1/2	6 1/2	2 9/16	5.15	9,700	5.2	3 3/8	2 1/4	1	1 1/2 x 16	1 1/8	3 5/16 x 12	1 15/16	12.0	P42
R252		2	6 1/2	8 1/2				10.3								15.0	
R254		4	8 1/2	12 1/2				20.6								18.0	
R256		6 1/4	10 3/4	17				32.2								23.0	
R258		8 1/4	12 3/4	21				42.5								27.0	P140
R2510		10 1/4	14 3/4	25				52.8								31.0	
R2512		12 1/4	16 3/4	29				63.1								35.0	
R2514		14 1/4	18 3/4	33				73.4								39.0	